

Please ensure that all persons working with this material have read and are aware of the following information.

FOLACOAT BASIC PET 1,15 mm (.045")

ARTICLE NO. 12534.115.99900


DESCRIPTION

Strippable coating plate with polyester base containing the following layers:

Surface: Red-transparent polymer for aqueous and UV-varnish transfer.

Carrier: Single polyester layer.

CONSTRUCTION AND CUTTING DEPTH (slipping film / protection film already removed)

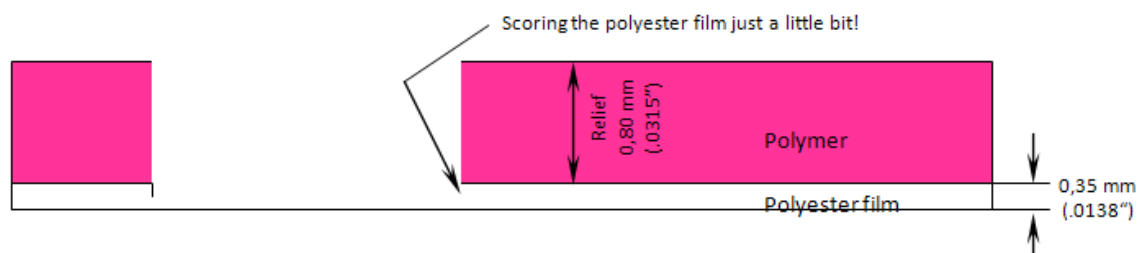

Recommended cutting depth: about 0.81 mm (.0318"). Please take care when cutting: The aim is to cleanly cut through the polymer and lightly score the base polyester, this will ensure clean removal of the polymer. The deeper the cut goes into the base material will have an influence on the life of the product. Too deep will shorten the life. Please ensure that the cutting depth is always constant. Avoid pulling at large areas that are not cut cleanly when removing as this will lift the areas that need to remain.

MATERIALTYPE	FOLACOAT BASIC PET 1,15 MM NEW QUALITY
Type of coating transfer	Direct coating
Total thickness	1.15 mm (.045")
Tolerance of thickness	± 0.05 mm (.002")
Carrier	Single polyester layer
Thickness of polymer	0.80 mm (.0315")
Thickness carrier	0.35 mm (.0138")
Plate Hardness	88 Shore A
Hardness Polymer (DIN 53505)	81 Shore A

The information contained herein is, to our best knowledge, true and accurate, but all recommendations or suggestions are made without guarantee, since the conditions of use are beyond our control. There is no implied warranty of merchantability or fitness for purpose of the product or products described herein. In submitting this information, no liability is assumed or license or other rights, express or implied, given with respect to any existing or pending patent, patent applications or trademarks. This observance of all legal regulations and patents is the responsibility of the user.

Status 10/2014

Version 10.0

Vertrieb und Konfektionierung durch / *Distributed and converted by:*